

Ramset Collated Gas Tool Fasteners are specifically engineered for optimal performance in Ramset Gas Power Tools using fastener magazines.

## SELECTION CHART



### T3MAG FUEL/PIN PACK

1000 PINS AND 1 FUEL CELL PER BOX



Larger .125 shank diameter offers improved success rate (15 pin strip)

PART NUMBER	PIN LENGTH		DESCRIPTION
	IN.	(MM)	
T3012	1/2	(12.7)	1/2" steel pin with T3 fuel cell
T3012S	1/2	(12.7)	1/2" premium steel pin with T3 fuel cell
T3034B	3/4	(19.1)	3/4" concrete pin with T3 fuel cell
T3034S*	3/4	(19.1)	3/4" step shank pin with T3 fuel cell
T3100	1	(25.4)	1" concrete pin with T3 fuel cell


Shank diameter = .125 \*Shank diameter= .104/.125  
Head diameter = .250

Sold in master cartons of 5000 minimum. Cartons cannot be split.



### TRAKFAST STANDARD FUEL/PIN PACK

1000 PINS AND 1 FUEL CELL PER BOX

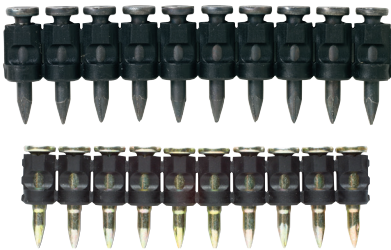

For high volume, repetitive fastenings to concrete and steel such as drywall track to concrete

PART NUMBER	PIN LENGTH		DESCRIPTION
	IN.	(MM)	
FPP012	1/2	(12.7)	1/2" Plated steel pin
FPP012S*	1/2	(12.7)	1/2" Premium Plated step shank pin
FPP034B	3/4	(19.1)	3/4" Black pin
FPP034S*	3/4	(19.1)	3/4" Premium Plated step shank pin
FPP100	1	(25.4)	1" Plated pin
FPP114	1-1/4	(31.8)	1-1/4" Plated Pin

Shank diameter = .109 \*Shank diameter = .104/.118  
Head diameter = .250

Sold in master cartons of 5000 minimum. Cartons cannot be split.

### TRAKFAST BREAKAWAY STRIP FUEL/PIN PACK

1000 PINS AND 1 FUEL CELL PER BOX



Collation designed to breakaway on impact. For high volume, repetitive fastenings to concrete such as wood furring to concrete

PART NUMBER	PIN LENGTH		DESCRIPTION
	IN.	(MM)	
FPP034T	3/4	(19.1)	3/4" Plated pin
FPP100T	1	(25.4)	1" Plated pin
FPP114T	1-1/4	(31.8)	1-1/4" Plated Pin
FPP112T	1-1/2	(38.1)	1-1/2" Plated Pin
PLY138	1-3/8	(34.9)	1-3/8" Plated Pin (Knurled)

Shank diameter = .109  
Head diameter = .250

Sold in master cartons of 5000 minimum. Cartons cannot be split.



## TRAKFAST PLYWOOD PIN (PART NO. PLY138)

### FOR ATTACHING PLYWOOD TO METAL STUDS



1000 pins and 1 fuel cell per box



- Fastener Length: 1-3/8"
- Shank Diameter: .100 dia. (before knurl)
- Head Diameter: .250
- Helical Knurled Shank
- Mechanical Zinc Plated
- Can Be Used With:  
Wood Sheathings: 3/8", 1/2", 5/8", 3/4"  
Steel Stud Gauges: 16, 18, 20

### ADVANTAGES

#### VS SCREWS

- 3 - 5 times faster than screw installation. No worrying about electrical cords.

#### STRIP

- Collation strip breaks away upon impact, allowing the head of the pin to recess into the wood for a nice, clean look
- 10-pin strips transfer easily from the operator's pouch to the TrakFast tool, eliminating waste

#### VS AIR SYSTEMS

- No set-up and tear down time. No hassling with compressors or hoses.

#### PINS

- Hardened steel pin ensures a clean penetration of the fastener — no dimpling of the stud
- Knurled helical shank gives the fastener superior holding values
- Zinc plated for corrosion resistance

Sold in master cartons of 5000.