

TRACK TOP GASKET

SPEEDFLEX®

- Simplify Installation
- Eliminate Sealant
- Improve Productivity





Install Track Top Gasket on the gypsum wall tracks in your next project.

TTG is a patented thin profile intumescent cover for gypsum wall framing for tracks, runners and studs that is designed to provide excellent and reliable fire, smoke and acoustical ratings for head of wall joints, wall to wall joints and bottom of wall joints between gypsum walls and concrete.

- It's faster to install
- It's easier to inspect
- It saves time and money

Peel and stick adhesive allows for easy attachment to framing members for faster installation.

- Firestop red provides visual compliance for inspection
- UL® Certified allowing up to 100% movement
- Cut-to-length rolls eliminate waste
- Fits most common track sizes
- The TTG350F and TTG600F come with pre-folded flaps

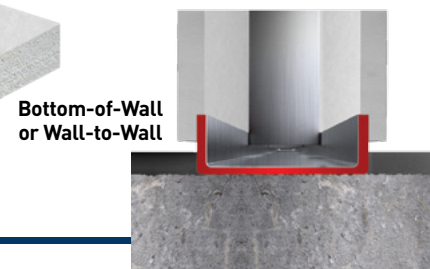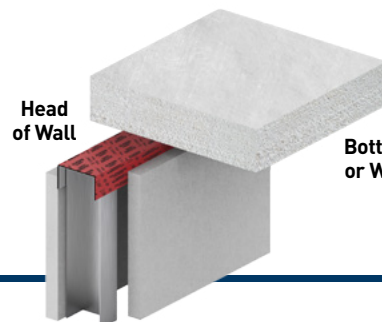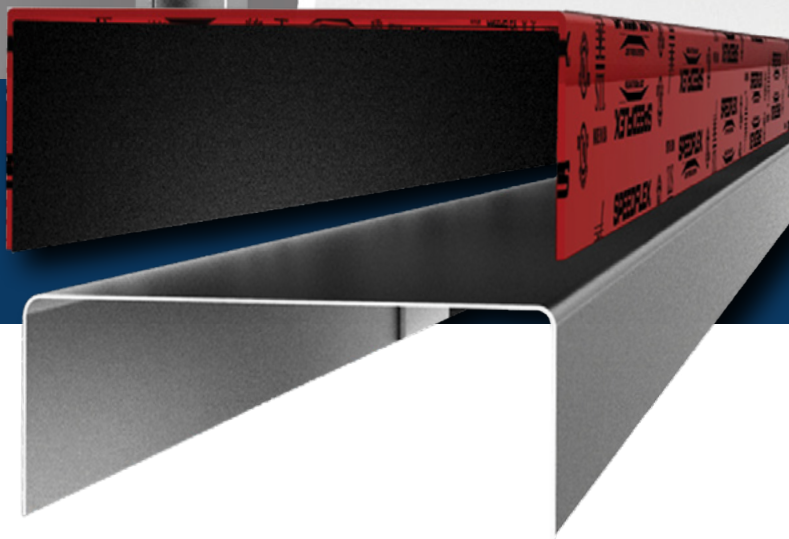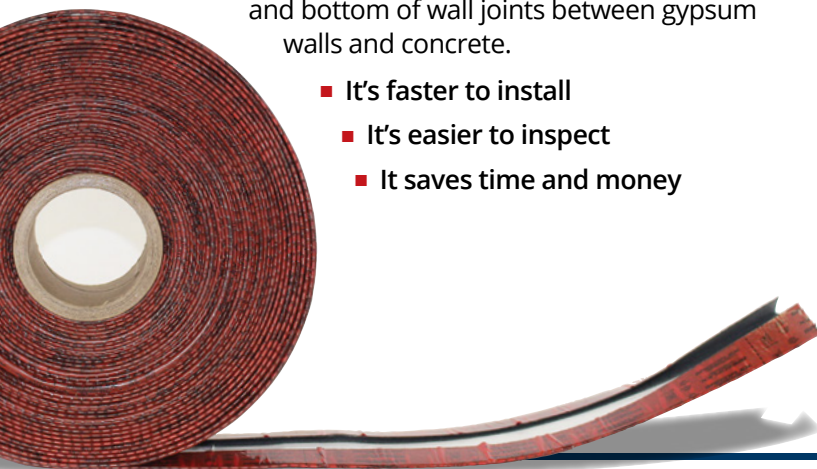

Contact your local STI Rep today for more information or visit stifirestop.com/ttg




Specified Technologies Inc. ■ stifirestop.com ■ 800.992.1180

Scan for more information

TRACK TOP GASKET

SPEEDFLEX®

SERIES TTG TRACK TOP GASKET

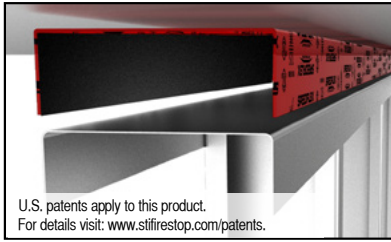

A SOUND, FIRE & SMOKE GASKET FOR JOINTS

SpecSeal® Track Top Gasket (TTG) is a patented thin profile intumescent cover for gypsum wall framing for tracks, runners and studs that is designed to provide fire, smoke and acoustical ratings for head of wall joints, wall to wall joints, bottom of wall joints and perimeter fire-barrier between gypsum wall(s) and concrete. TTG is compatible with most ceiling track and provides an economical method of providing the required seal in rated and non-rated wall construction. Installed on the track prior to installation, the wall is effectively sealed against fire, smoke, and sound transmission during the construction process, thereby providing cost savings. TTG allows up to 100% movement. The red color is easy to identify and easy to inspect, and it is not susceptible to cracking, sagging, or dripping.


APPLICATIONS

Head-of-Wall, Bottom-of-Wall, or Wall-to-Wall Joints

- Gypsum to Flat Concrete Slab
- Non-rated acoustical walls or fire/smoke rated walls

TESTING & APPROVALS

Performance Criteria	Standards	Values
Fire Standards	ASTM E1966, ANSI/UL2079, CAN/ULC S115	1 and 2 hour assembly ratings
Acoustical Standards	ASTM E 90-09, ASTM C919	Up to 56 STC (Relates to specific construction)
Air/Smoke Leakage	ANSI/UL2079	<1 CFM/Lin Ft



SpeedFlex® Track Top Gasket
 FILL, VOID OR CAVITY MATERIAL.
 CERTIFIED FOR USE IN JOINT SYSTEMS.
 SEE UL ONLINE CERTIFICATIONS DIRECTORY.

FEATURES & BENEFITS




- Easy to install; easy to inspect
- Easy to cut; use scissors or a sharp knife
- No waste; use as needed
- Works with most ceiling tracks
- Firestop as the wall is constructed
- Water resistant
- Won't crack, sag, or drip; done right the first time, and no costly callbacks.
- Cost savings; no secondary trips up the ladder or caulking crews on scissor lifts
- Red for easy identification with UL Mark prominently displayed to satisfy inspectors and AHJs
- Acoustical values (STC) in both rated and non-rated construction allowing you to use one product for the entire job
- L Ratings per UL2079 for use in smoke barrier construction

PHYSICAL PROPERTIES

PROPERTY	VALUE
Color	Red
Construction Core	0.040 inch (1 mm) thick intumescent matrix
Shell	3.5 mil Polyethylene
Expansion Ratio	15:1
In-Service Temperature	< 130°F (54°C)
L Rating (ANSI/UL2079)	<1 CFM/Lin Ft
STC Rating (ASTM E 90-09/ASTM C919)	up to 56 (Relates to specific construction)
Movement Capabilities (ANSI/UL2079/ASTM E1966)	Up to 100%
Shelf Life	No Limit
Accelerated Aging	> 30 Years

INSTALLATION INSTRUCTIONS

- Step 1:** Center the TTG on the top of track. Optionally, secure TTG with integral crack and peel adhesive or with bands of pressure-sensitive tape (e.g. electrical, duct, packing, filament or masking tape).
- Step 2:** Secure track to floor/ceiling in the normal manner.
- Step 3:** Verify that downward projecting flaps are sandwiched between gypsum board and steel ceiling track. Seams in adjoining lengths of gasket may be butted or overlapped.



AVAILABILITY

SpeedFlex® Track Top Gasket is available worldwide from authorized STI Distributors. Visit www.stifirestop.com to find a local distributor.

ORDERING INFORMATION

UPC# 730573	Cat. No.	Description	Weight	Width
08250	TTG250J	Track top gasket for 2.5" (63.5 mm) J-Runners - 150 foot (45.7 meter) roll	16.3 lbs (7.4 kg)	6.25 (159 mm)
08355	TTG350F	Track top gasket with folded legs for 3-1/2" (89 mm) or 3-5/8" (92mm) ceiling track - 2x 80 foot (24.4 meter) rolls	16.4 lbs (7.4 kg)	6.25 (159 mm)
08400	TTG400J	Track top gasket for 4" (102 mm) J-Runners - 150 foot (45.7 meter) roll	21 lbs. (9.5 kg)	7.50 (191 mm)
08600	TTG600F	Track Top Gasket with folded legs for 6" (152 mm) ceiling track - 2x 80.5 foot (24.5 meter) rolls	24 lbs. (10.9 kg)	8.625 (219 mm)
08602	TTG600J	Track top gasket for 6" (152 mm) J-Runners - 150 foot (45.7 meter) roll	25.5 lbs (11.6 kg)	9.75 (248 mm)